




# AUGER DRIVE MOTORS 56N 2 bolt flange mount



- Centrifugal switch over-speed protection
- Manual reset thermal overload
- Class F insulation - Class B temperature rise

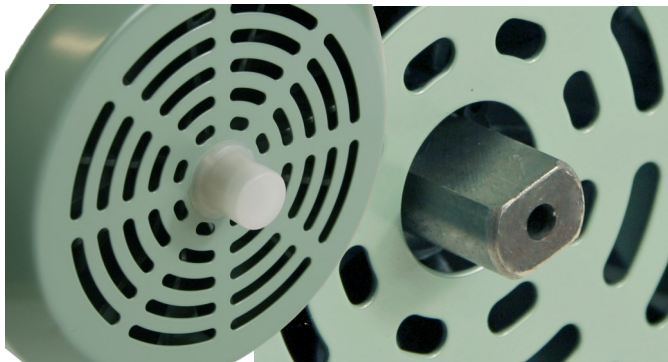

- Durable steel fan guard
- Rear shaft extension (7/16 in.) for manual jogging with wrench



- X-Large T/Box with 5 knockouts
- Upgraded gasketing
- Epoxy powder coat paint
- Zinc plated hardware

< = 1/2 X 1.5 in. shaft with flat    + = 5/8 X 2.0 in. shaft with keyway    \* = Premium Efficiency

HP	RPM	FRAME	VOLTAGE	IND#	REF. NO.	230V FLA	OVER-LOAD	WGT LB	"C" DIM.
.33	1800	56NY	115/208-230	C291	<C334DF5NMAU	2.9	MAN.	25	11.3
.50	1800	56NY	115/208-230	C292	<C054DF5NMAU	3.9	MAN.	26	11.3
.75	1800	56NY	115/208-230	C293	<C754DF5NMAU	5.0	MAN.	30	11.9
1.0	1800	56NY	115/208-230	K294	*+K104DF5NMAU	4.4	MAN.	39	13.1
1.5	1800	56NY	115/208-230	K295	+K154DF5NMAU	9.0	MAN.	43	13.5

**AG-I MotorTec Inc.**

Visit our website @ [www.ag-industrie.com](http://www.ag-industrie.com)

Ontario 519-941-6832

Email [info@agimotortec.com](mailto:info@agimotortec.com)

Quebec 438-395-1541